


Xline X-1




Size

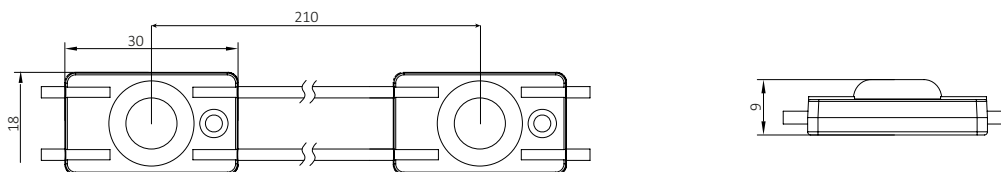

A new generation of innovative solutions for narrow light boxes with a depth of 30 - 200 mm. Equipped with a new generation 3030 LED chip with high efficiency.

Light scattering angle

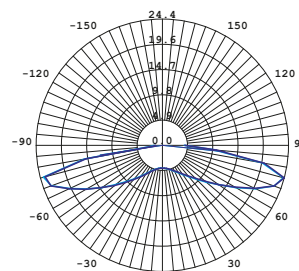

Scattering angle: 175°

Technical information

Available colors: ○

Power **1,2W**

Light flux **120 lm**

Crystal type	3030
Operating voltage	12V DC
Glow temperature	○7000 K
Scattering angle	175°
Protection class	IP 67
Working temperature	-30 +50 °C

Installation:

- Narrow light boxes 30-200 deep

Features and benefits:

- Maximum temperature Tj 65°C
- Luminance drop < 20% over three years
- CRI over 70
- High level of protection Ip67
- 5-year warranty

Packaging information

Packaging	In a chain	In the package	In a box
Number	20 PCS	200 PCS	2000 PCS
Weight	0,2 kg	2,0 kg	20,0 kg



Illumination table

Installation depth	Installation step by centers of modules	Number per 1 m ²	Power per 1 m ²
60 mm	170 mm	36 PCS	43 W
80 mm	220 mm	20 PCS	25 W
100 mm	270 mm	16 PCS	20 W
120 mm	350 mm	10 PCS	12 W