


Module 3014



A budget solution for small letters and complex shapes with a depth of 30-70 mm. Thanks to the increased brightness, excellent illumination of the sign is achieved. At a depth of 70 mm, the step along the centers of the module will be 70 mm.


Installation:

- 3D illumination of LED letters with a depth of 30-80 mm
- Light box 50-80 mm deep


Features and benefits:

- Small dimensions 18*8*2.9
- Luminance drop <20% within 2 years
- CRI greater than 70
- HB level of fire safety
- High level of protection Ip65
- Warranty 2 years

Size

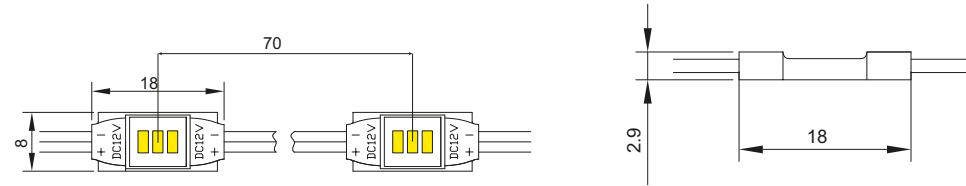

Light scattering angle

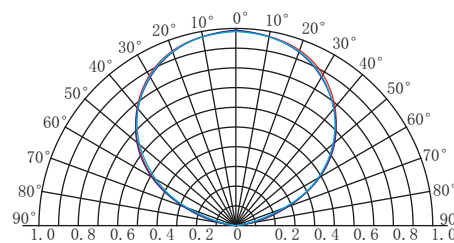

Technical information

Available colors:

Power **0,3W**

Light flux **35 lm**

Crystal type	3014
Operating voltage	12V DC
Glow temperature	○6500 K
Scattering angle	120°
Protection class	IP 65
Working temperature	-30 +50 °C

Packaging information

Packaging	In a chain	In the package	In a box
Number	20 PCS	1000 PCS	10000 PCS
Weight	0,2 kg	2 kg	16 kg



Illumination table

Installation depth	Installation step by centers of modules	Number per 1 m ²	Power per 1 m ²
40 mm	50 mm	400 PCS	144 W
50 mm	50 mm	400 PCS	144 W